


**TWO NEEDLE FOUR THREAD SAFETY STITCH MACHINE
FOR OVERSEAMING HEAVY WEIGHT JUTE BAGS**

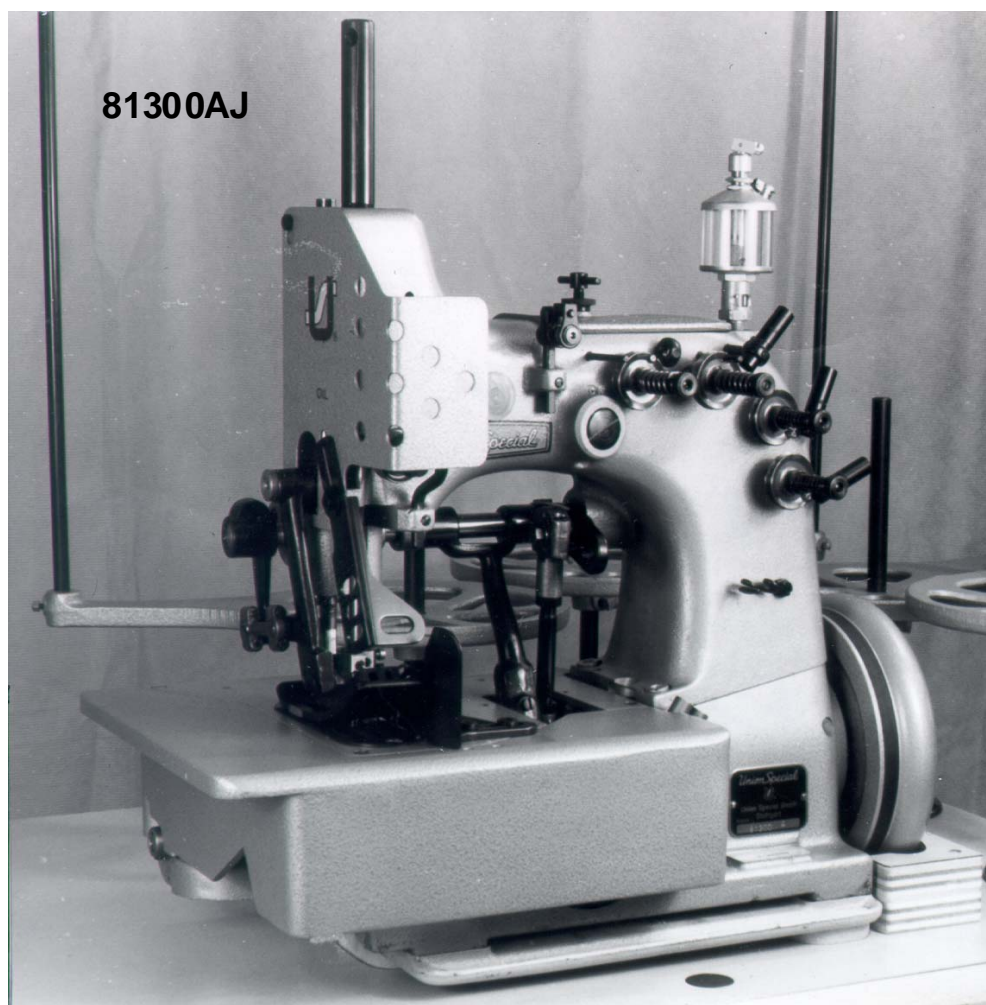

81300AJ

Two needle high throw (71 mm) four thread safety stitch machine with lower and upper feed. Especially for overedge seaming on heavy weight **jute bags**. Easy to start on matched prehemmed edges. Overedge seam width 10 mm = seam width overall 15 mm.

Threads to be used 1/3 pound or 8/3 pound, depending on seam strength.

The machine has a higher output and productivity over all conventional methods of over stitching the sides of A-twill, B-twill or heavy-cess sacking fabric.

Stitch Range:	6.3 to 13 mm
Standard Setting:	10 mm
Sewing Capacity:	up to 19 mm (depending on fabric)
Standard Needle:	9853GA430/172
Max. Speed:	1400 RPM (depending on sewing operation)
Seam Specification:	(401.502) SSa-2
Needle Distance:	5 mm

Sewing Table UN380A743L with Clutchless Electronic Drive or
Sewing Table UN380G132 with Clutch Motor.

● EFFICIENT

● RELIABLE

● STURDY