
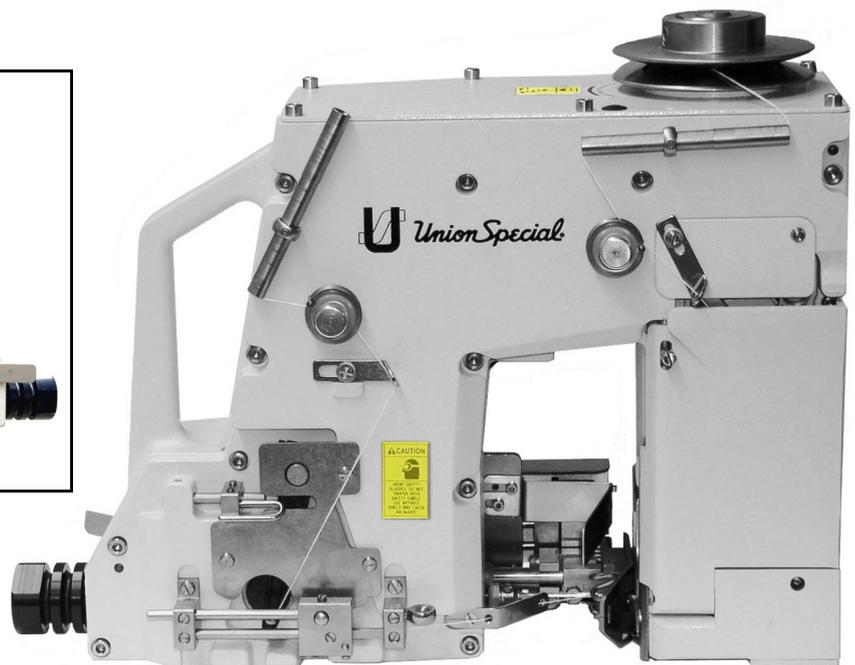


Introducing the better choice . . .

High performance two thread double locked chainstitch bag closing machine in automatic version with vertical acting presser foot system and rust protected parts. For closing filled bags with or without a crepe paper tape.

New Generation

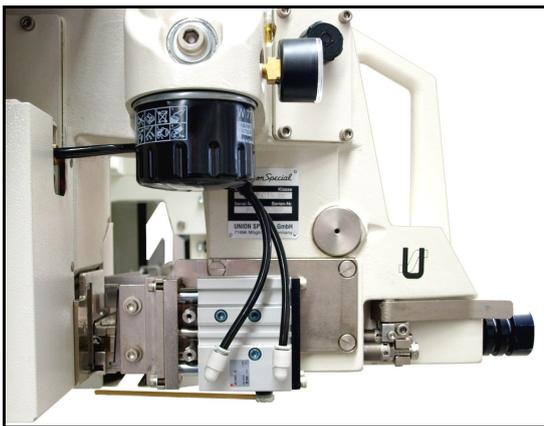

. . . in bag closing

Features:

- Vertical acting presser foot system
- Rust protected external parts
- Fast: up to 2750 RPM, depending on stitch length, operation and material.
- Low noise and vibration
- Shell design casting
- Variable pitch pulley/handwheel
- New thread control system
- Internal forced lubrication
- Feeding direction right to left

Benefits:

- Independently adjustable chaining and pressure foot pressure for optimized bag feeding
- Protection against rust
- High production: up to 44 bags of 50 kg per minute with a linear sewing speed up to 33 m/min. (108 ft/min.) depending on stitch length, operation and material.
- Longer part life
- Easy and quick sewing speed adjustment
- Easily set a loose or tight seam as needed
- Simplified maintenance

● **STURDY**

● **RELIABLE**

● **EFFICIENT**

Automatic bag closing machines with vertical acting presser foot system and rust protected parts.

BC211UA26-1M: High performance two thread double locked chainstitch bag closing machine in automatic version for closing filled bags with or without a crepe paper tape. (Without tape folder) Thread chain with or without filler cord (respectively crepe tape) are automatically trimmed by an "advanced" electro-pneumatically operated guillotine. (Actuated by double acting air cylinder, see picture detail) Advantage: Reliable trimming of thread chain with or without filler cord (respectively crepe tape).



For application with bag feed-in devices.



Sewing without
crepe tape



Sewing with
crepe tape

Start-Stop:	automatically by feeler controlled proximity switch
Control voltage:	24 V DC
Maximum speed:	up to 2750 stitches / min., depending on material and sewing operation
Sewing speed with crepe paper tape:	up to approx. 12m/min. (stitch length setting 8 mm)
Stitch length:	6.5 -12.5 mm, standard setting 8 mm
Stitch type:	(401)
Capacity under presser foot:	12.7 mm
Sewing capacity on paper bags:	up to 32 plies of paper depending on weight of paper

BC211UA26-1MZ4061:

Same as BC211UA26-1M, but with needle cooler pipe attached.

BC211UA25-1:

Same as BC211UA26-1M, but without electro-pneumatic components and without solenoid valve.

BC211UA25-1NZ4061:

Same as BC211UA25-1, but with needle cooler pipe attached.